

Ace Resources Title 24 Part 6 Residential Triggers Sheet

HVAC Alterations

Split Systems and Packaged Systems	Mandatory Measures					Prescriptive Requirements	
	Setback Thermostat	Cooling Load Calcs	Heating Load Calcs	HERS: Duct Seal and Test	HERS: Cooling Coil Airflow and Fan Watt Draw	Duct Insulation	HERS: Refrigerant Charge
Change this (and nothing else)	§110.2(c) §150.2(b)F	§150.0(h), §150.2(b)1C	§150.0(h), §150.2(b)1C	§150.0 (m)1-3 & 11 §150.2(b)1C,D, & E	§150.0(m)12, 13 & 15 §150.2 (b)1C, D	§150.1(c)9 §150.2(b)1D	§150.1(c)7 A §150.2(b)1 F
Whole split or packaged system (no ducts added or replaced)	YES	no	no A	YES ^B	no	no	YES ^{C, D}
Evaporator coil (cooling coil), condenser coil, or outdoor condensing unit	YES	no	no A	YES ^B	no	no	YES C, D
Furnace (air handler)	YES	no	no ^A	YES ^B	no	no	YES C, D
Compressor, refrigerant metering device	YES	no	no ^A	no	no	no	YES C, D
Some ducts	no	maybe ^E	maybe ^{A, E}	YES ^B	no	YES F	no
"All new" ducts G	no	maybe ^E	maybe ^{A, E}	YES H	YES I	YES F	no
Whole split or packaged system and all new ducts	YES	YES E	YES ^{A, E}	YES H	YES I	YES F	YES C, D

NOTE: Replacing the blower wheel fan is considered a repair and does NOT trigger the Standards.

+ All new HVAC equipment must meet minimum federal efficiency requirements


+ Cooling line insulation is triggered if the line set (cooling system, suction line) is replaced or repaired. Line sets <1.5" in diameter must have 0.5" thick insulation.

^A Heating equipment must meet CBC minimum capacity requirements.


- ^B Unless exceptions apply, duct systems must be sealed and verified if >40 feet of ducts in unconditioned space. Duct system leakage must be <15% in total, or <10% to the outside. Or, if unable to meet the sealing requirements, all accessible leaks must be sealed and verified by a HERS rater.
- ^C HERS verification of refrigerant charge is required in climate zones 2 and 8–15 only when a refrigerant containing component of an air conditioner or heat pump is replaced or installed in an existing building.
- ^D Although there are no commercially available HVAC systems with approved Charge Indicator Display (CID) devices at the time of publication (July 2014) the Standards do allow use of a CEC-approved CID should such equipment become available during the 2013 code cycle.
- ^E Cooling and heating load calculations are required when ducts are added to serve new conditioned space, such as an addition.
- F When adding or replacing >40 feet of ducts in unconditioned space: CZ 1-10 and 12-13: R-6; CZ 11 and 14-16: R-8. HERS verification is required for insulated ducts in conditioned space. Mandatory duct insulation requirements (R-6) apply to all new or replacement ducts (not existing or unaltered ducts).
- ^G The system is considered to have "all new" ducts when 75% or more of the ducts are new material and up to 25% reused parts from the existing duct system (e.g., registers, grilles, boots, air handler, coil, plenums, duct material) if the reused parts are accessible and can be sealed to prevent leakage.
- ^H In all climate zones, when new duct systems are installed in unconditioned space, leakage must be ≤6% of the air handler airflow.
- When new duct systems are installed, cooling coil airflow must be >350 CFM per ton, and fan watt draw must be <0.58W/CFM. Alternatively, the system can meet the requirements in Table 150.0-C or Table 150.0-D (Return Duct Sizing and Filter Sizing).



2013 Entirely New or Complete Replacement Space-Conditioning System



2013 Altered Space-Conditioning System

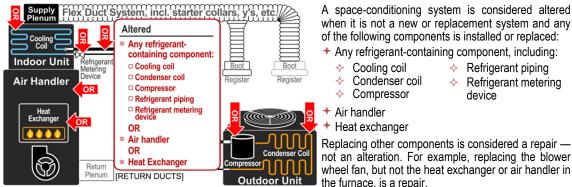

Flex Duct System, incl. starter collars, y's, etc.

Entirely new or complete replacement duct systems are those that

contain at least 75% new duct material. Existing duct system

components (up to 25%) may be reused if they are accessible

The Duct Sealing and Testing HERS measure must demonstrate

a leakage rate less than or equal to 6% of the system air handler

airflow. In addition, verification of Cooling Coil Airflow and Fan

Watt Draw (HERS measure) is required. The system must have

airflow >350 CFM per ton of nominal cooling capacity through the

return grilles, and an air-handling unit fan efficacy ≤0.58 W/ČFM.

A space-conditioning system is considered entirely new or a complete replacement when all of the following are installed or replaced:

§150.2(b)1C

§150.2(b)1E, F

- + All the system heating/cooling equipment
- + ≥75% new duct material G

Required Documentation

For All HVAC Alterations

All HVAC alterations require:

- Permit for all HVAC changeouts
- CF1R: Certificate of Compliance: Alteration to an HVAC System (CF1R-ALT-02*-E, or CF1R-ALT-03-E or CF1R-ALT-04-E)
 - Submitted to the building department by the contractor or the home owner
- CF2R-MCH-01-H: Certificate of Installation for Space Conditioning Systems, Ducts and Fans

Completed and signed by the installing contractor and made available for final inspection by building department

For HERS Measures

Projects with HERS measures require:

- + Registration of the CF1R, via HERS Provider
- CF2R-MCH...H: Certificates of Installation for mechanical system with HERS measures

Completed and signed by the installing contractor; must be submitted to a HERS Provider Registry after the contractor has signed it, and made available for inspection by the building department

+ CF3R-MCH...H: Certificates of Field Verification for mechanical system with HERS measures

Completed and registered by a HERS Rater for each CF2R-H; the HERS Rater or contractor ensures the relevant CF3Rs are available for final inspection by the building department.

- HERS: Duct Leakage Diagnostic Test
 - ♦ CF2R-MCH-20*-H and CF3R-MCH-20*-H
- HERS: Fan Efficacy (Fan Watt Draw)
 - CF2R-MCH-22-H and CF3R-MCH-22-H

and

or

- HERS: Space Conditioning System Airflow Rate
- CF2R-MCH-23*-H and CF3R-MCH-23*-H
- HERS: Refrigerant Charge Verification
- ♦ CF2R-MCH-25*-H and CF3R-MCH-25*-H

- CF2R-MCH-25f-E (for packaged systems with refrigerant charge certified by manufacturer)
- Correct version (e.g., "a" or "b" or "c") varies depending upon the project scope and approach used to demonstrate compliance

For Projects with New or Replacement Duct Systems using Duct and Filter Sizing

Projects that use Duct and Filter Sizing instead of the Cooling Coil Airflow and Fan Watt Draw HERS Measure require:

CF2R-MCH-28-H and CF3R-MCH-28-H



New/Replacement

and can be sealed G

≥75% new duct material

Entirely New or Complete Replacement Ducts



Boot




© 2013, 2014 Pacific Gas and Electric Company, San Diego Gas and Electric, Southern California Gas Company and Southern California Edison. All rights reserved, except that this document may be used, copied, and distributed without modification. Neither PG&E, Sempra, nor SCE — nor any of their employees makes any warranty, express of implied; or assumes any legal liability or responsibility for the accuracy, completeness or usefulness of any data, information, method, product, policy or process disclosed in this document; or represents that its use will not infringe any privately-owned rights including, but not limited to patents, trademarks or copyrights.

§150.2(b)1D

♦ Refrigerant piping

♦ Refrigerant metering



Alteration or Extension of Existing Ducts

In all climate zones when more than 40 feet of new or replacement system ducts are installed as an extension of an existing duct system. Duct Sealing and Testing (HERS measure) is required, and the measured leakage shall be equal to or less than 15% of system air handler air flow.

(There are alternatives to meeting the maximum 15% leakage. Consult your Building Department or §150.2(b)1Diib in the Standards.)

Compressor device

Heat exchanger

Condenser coil

Replacing other components is considered a repair not an alteration. For example, replacing the blower wheel fan, but not the heat exchanger or air handler in the furnace, is a repair.